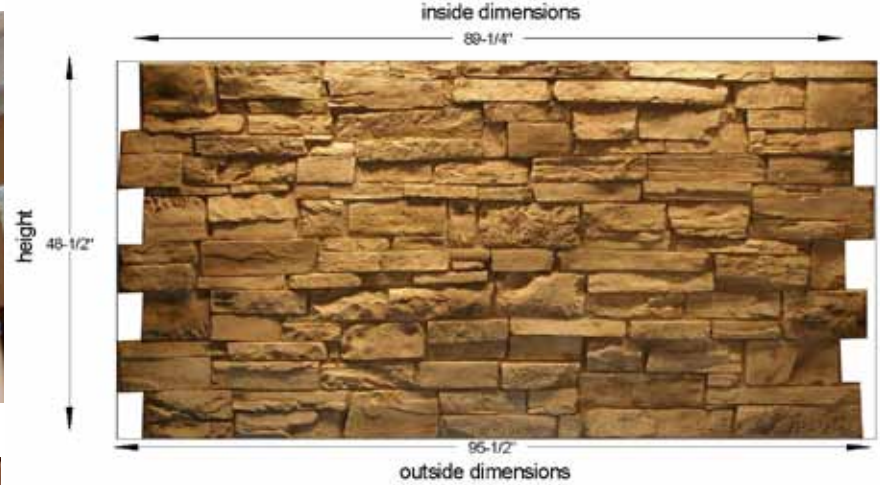
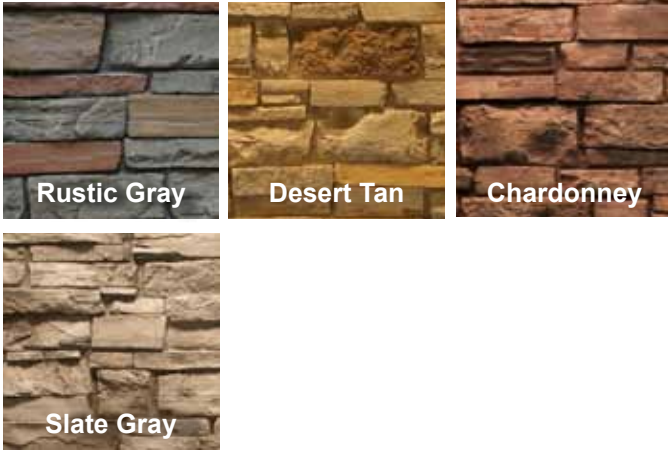


LEDGESTONE TEXTURE


COLORS

DIMENSIONAL DATA

Height	48 1/2"
Width (Overall)	96 1/2"
Width(Inside)	89 1/4"
Thickness	1 1/2" - 1 3/4"
Coverage	32 sq ft
Panel Weight	40 lbs
Packaging Dimensions	

TEST	TEST METHOD	RESULTS	
		Structural Polyurethane Surface Layer	Polyurethane Foam Layer
Weather Resistance	ASTM G 52/QUV (4000HRS)	no cracking or chalking	N/A
	ASTM D 1435/ 3 years 45 degree fence	no cracking or chalking	N/A
	ASTM D DSET Testing	no cracking or chalking	N/A
Water Resisitance	ASTM D 2247 (One Year)	no deteriorating affects, such as cracking, chalking or delamination	N/A
Humidity Cycling	ASTM D 2247 (90 Days)	Passes	Passes
Freeze/Thaw Cycling	10 Cycles - water soak/freezer/oven	Passes	Passes
Salt Spray	ASTM B 117 (1000 hrs)	Passes	Passes
Low Temperature Resistance	-40 Degree °F	Passes	Passes
High Temperature Resistance	ASTM D 573/ Continuous 200 °F	Passes	Passes
	Intermediate 250 °F	Passes	Passes
Tensile Strength	ASTM D 412	3500 - 4500 PSI	N/A
Elongation	ASTM D 412	25% - 60%	N/A
Flural Modulus	ASTM D 790	150,000 PSI	N/A
Flural Strength	ASTM D 590	7600 PSI	N/A
Coefficient	ASTM D 955	0.8 - 1.4 x 10-4 in/in F	N/A
Fire Classification	ASTM E-84	Class A Optional	
Insulation Value	ASTM C 518 (per inch)	N/A	R 2.0 - 3.6
Mold Resistance	ASTM C 1338	Passes	Passes